

Frequently Asked Questions


Road & Trail Improvement Projects Coming to the Lynnwood Area | Open House October 12, 2022



Question	Alderwood Mall Pkway Corridor	Ash Way Corridor	Interurban Trail Impr.	36th/35th Ave W Impr.	164th Ave SE Overlay
Where is the project located? (See map on back for details.)	Road improvements will extend from the 16800 block to the SR 525 northbound ramps.	Road improvements will extend from Admiralty Way/ Gibson Rd to the roundabout at 18th Ave W.	The new section of trail will extend from 160th St SW to 167th Pl SW on the west side of Meadow Rd/ 13th Ave W.	Road improvements will be between 164th St SW to Hwy 99.	The overlay will extend from Spruce Way to Ash Way.
Why are you doing this project?	The unincorporated Lynnwood area is one of the most densely populated areas of Snohomish County. Lynnwood is also a significant retail engine in the county and is expecting the arrival of light rail service in 2024. To meet traffic and pedestrian demands in the surrounding unincorporated area, Snohomish County Public Works is planning these projects.				Overlay will extend the useful life of the roadway and provide a smoother drive for vehicles.
What are the project improvements?	The project would widen the road to five lanes, including a center turn lane, raised bike lanes, sidewalks, gutters, curbs, drainage facilities, three fish passage culverts, and new traffic signals at the SR 525 northbound ramps intersection. Snohomish County is also planning to overlay Alderwood Mall Parkway from 164th St SW south to the Lynnwood city limits.	Improvements include widening the road to three lanes, adding pedestrian and bike facilities, improving intersections, and adding stormwater treatment facilities.	This project will construct trail improvements for approximately 0.5 mile on the west side of Meadow Rd/ 13th Ave W.	Planned improvements include adding a two-way center turn lane, sidewalks, bike lanes, bus pullouts, streetlights, landscape features, and stormwater drainage facilities.	Improvements include overlaying asphalt, upgrading curb ramps to ADA standards and installing conduit for future Accessible Pedestrian Signals (APS) installation.
How much is the estimated construction cost?	\$13 million	Phase 1 & 3: \$28 million; Phase 2: \$14 million	\$2.7 million	\$9 million	\$2.6 million

(continued on back)

Question	Alderwood Mall Pkwy Corridor	Ash Way Corridor	Interurban Trail Impr.	36th/35th Ave W Impr.	164th Ave SE Overlay
Will right of way need to be acquired for this project?	Yes. The right-of-way plan is not yet approved by Snohomish County Council.	Yes. The right-of-way plan is not yet approved by Snohomish County Council.	Yes. The right-of-way plan is not yet approved by Snohomish County Council.	Right-of-way for this project is in the process of being acquired.	No right of way is needed for this project.
What is the timeline for this project?	This project is in the design phase and construction is scheduled to begin in 2024.	Construction for Phase 2 is tentatively scheduled for 2027-2028, contingent upon permit approval and funding availability. Construction for Phase 1 and 3 will be determined based on funding availability.	This project is in the design phase and is scheduled to go to construction in 2025, pending funding availability.	Construction is scheduled to begin in spring 2023.	Construction is scheduled to begin in spring 2023.

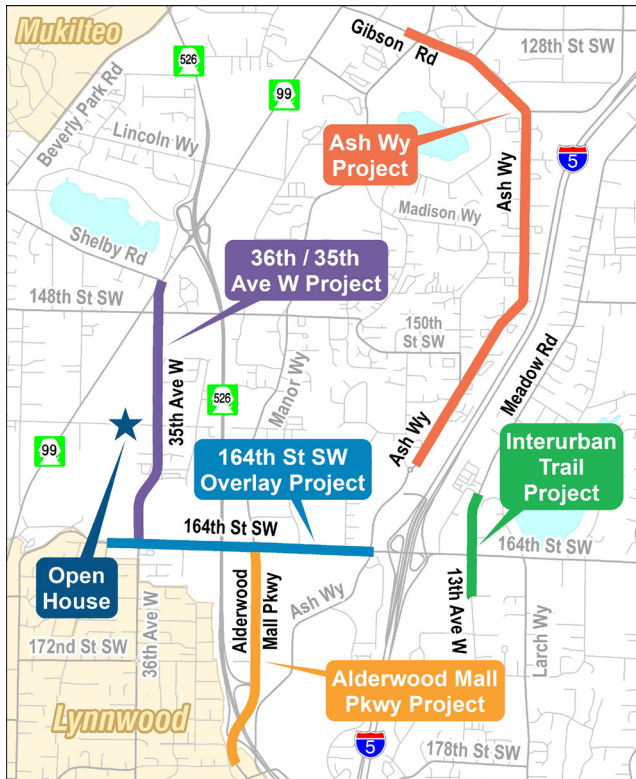

Learn More!

More information about each project is available on the project webpages. To be notified of project updates, sign up under “Stay Informed” in the right sidebar on each page.



Alderwood Mall Parkway Corridor:
snohomishcountywa.gov/5494



Ash Way Corridor:
snohomishcountywa.gov/2694



Interurban Trail Improvements:
snohomishcountywa.gov/5872



36th/35th Ave W Improvements:
snohomishcountywa.gov/659



164th St SW Overlay:
snohomishcountywa.gov/6123

Questions?

Email ROAD@snoco.org

Call 425-388-ROAD (7623)

Provide Feedback

Use the online form to provide us with your comments on these projects:



bit.ly/LynnwoodSurvey2022